




2. In this example we can assign a prefix for [urn:oasis:names:specification:ubl:schema:xsd:Invoice-2](#) with the name **def**.

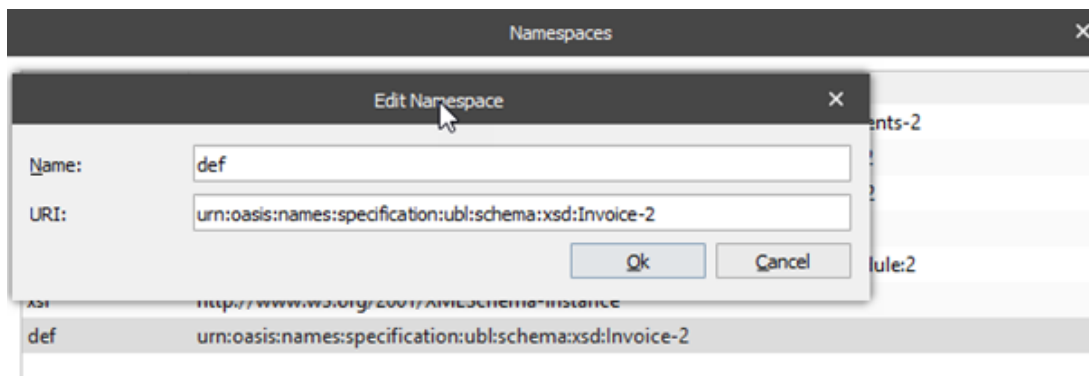

3. After assigning a prefix for the default namespace you can add the delete action using the newly created prefix for the Invoice node.

Type in the prefix(def:) yourself. Then the delete action will work.